

#### DISSERTATION

# Cool Science

ausgeführt am Atominstitut



der Technische Universität Wien Fakultät für Physik

unter der Anleitung von
Univ.Prof. Dipl.-Ing. Dr.techn. Gorge Hammond

Projektass. Dr.rer.nat Rodney MacKay MSc. Projektass. Dr.techn. Dr.techn. Dr.techn. Dipl.-Ing. Samantha Carter

durch

### **Daniel Jackson**

Matrikelnummer: 9-18-27-15-21-36 Stadionallee 2 1020 Wien

Wien, am 22.04.2020

"The Setesh guard's nose drips."  ${\it Teal'C}$ 

# **Contents**

1	Vacuum test chamber						
	1.1	First iteration					
		1.1.1	Parts	1			
		1.1.2	CRT mounting mechanism	2			
		1.1.3	Leak test	2			
To	do li	st		4			

## 1 Vacuum test chamber

- 2 ignore from here
- 3 Vacuum chamber -> Frank
- 4 Kurz: Wie sieht die Kammer aus, ev. Wie ist die CRT drinnen gemountet
- 5 CRT Mount ??
- 6 2020-08-30 leak rate 2020-09-27 set voltages 2020-09-30 first successful external run
- 7 2020-10-07 spot vs pressure 2020-10-22 current measurement aluminum foil 2020-11-05
- 8 forgot to turn off filament heating 2020-11-14 assemble chamber with copper rings
- 9 to here
- In order to be able to fit the CRT screen, CF160 flanges were chosen for the test chamber. At one point during testing major changes were made, resulting in a differentiation by iteration.

### 1.1 First iteration

A 3D render of the chamber is shown in (fig. 1.1).

#### 15 1.1.1 Parts

- 16 The center piece consists of a 6-way cross with view ports at the front and bottom.
- 17 A valve was installed at the back in order to flood the chamber with nitrogen when
- installing a new CRT to avoid oxygen poisoning. On the right side, a HiCube 300 Eco
- 19 turbo pump was installed and on the left side a wobble stick was attached with a wire.
- 20 A nipple fitting was installed at the top with a 5 port cluster flange, each being of
- type CF63.
- In the middle port, a VSH vacuum transducer was installed to measure pressure.
- This needs a 24 V dc power supply. On the left, a 19 pin connector was installed to
- supply the necessary voltages to the CRT. Two flanges were equipped with four BNC
- feedthroughs each. One of them was used to connect do the x-, and y-plates, while the

pure nitrogen name?

length

how many pins model name?

other connected to the wobble stick and aluminum foil at the CRT screen. Further explanation will be given in . The last port was capped off by a blank flange.

ref cd:Beam chterization, inclupicture there

5


10

11

12

fod length?

For the inside wires, stranded copper cables were used. The chamber was sealed by rubber gaskets.

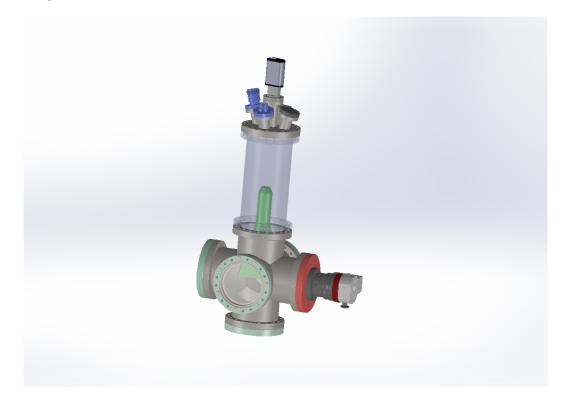

**Figure 1.1:** 3D rendering of test chamber.


## 1.1.2 CRT mounting mechanism

Two M8 rods of length were drilled into the cluster flange. On each, a L-piece was installed between two nuts and they were connected by an hose clamp. Two of these were used to secure the CRT inside the nipple facing the cross (fig. 1.2).

1.1.3 Leak test

Before inserting a CRT, a leak test was performed. First, the chamber was set to a pressure of  $10^{-5}$  mbar after which the pump was turned off. The pressure was measured once a minute for a duration 3 h. The plot is shown in fig. 1.3.

erwähne verkabelung gummi vs kupfer dichtung l-piece schlauchbinder (hose clamp)

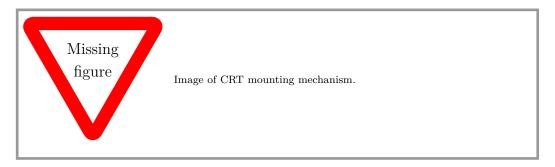

**Figure 1.2:** Image of CRT mounting mechanism.

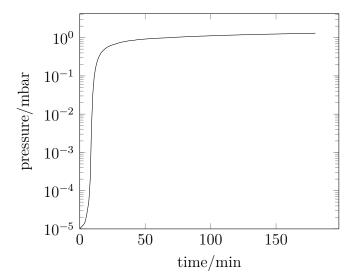


Figure 1.3: Leak rate of test chamber after turning off pump.

# Todo list

	pure nitrogen name?	1	2
	length	1	3
	how many pins and model name?	1	4
	ref cd:Beam characterization, include picture there	2	5
	rod length?	2	6
Fig	gure: Image of CRT mounting mechanism	3	7

1